

OPTIMIZATION AND MODELING OF CREASING MACHINE- A CRITICAL REVIEW

LALITA KHATRI, S.G.MAHAKALKAR

Abstract: Today's fast moving rapid world needed a higher production rate of any machine. The requirements are day by day increasing and available resources are limited. Hence we need to use the existing systems and have to plan the production sequence to optimize the output. The present study focuses on the creasing behavior of corrugated sheets. To fold a board in a proper way, crease lines are applied to define the folding line and to reduce the necessary moment for folding. The purpose of this study is to understand and predict failure of corrugated sheet during the creasing process and increases the output. The present paper focuses on the setup time required for changing and setting up the creaser depending on the width of corrugated sheets. The major aim is to increase the productivity of the plant either by changing the creaser attachment or by some other related failure diagnosis and correction. The model of existing machine is prepared by using PROE and the analysis being carried out using FEM, ANSYS for checking chances of improvement.

Keywords: Creasing machine, CAD, FEM, Creasers, Productivity etc .

Introduction: We all know corrugated board as used in boxes, but its origin is surprisingly different. In the 19th century, hand-cranked corrugated roller presses were used to generate corrugated paper. Corrugated paper replaced the plain paper which was used to keep the shape of the tall, stiff hats worn by gentlemen. It is a machine which is used to crease the corrugated sheet and along that creased edges, the sheet is folded to make the box.

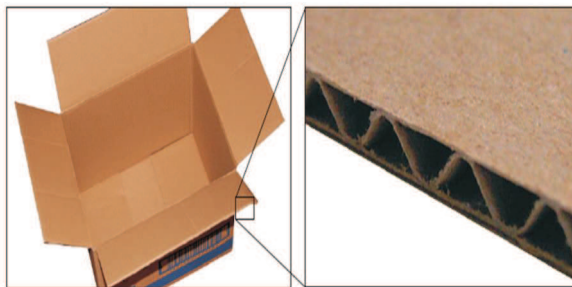


Figure 1.1 An example of a cardboard box at different scales

A creasing machine has upper and lower drums between which material to be cut is passed and being creased by the pattern of cutter. It consists of two rolls and 6 to 8 circular cutters. The creasing roll is attached by the belt, which drives these rolls. When the cutter rotates up & down then it creases the corrugated sheet box at the desired gap. The new cylinder was stronger than plain paper. Later, corrugated paper was first used to wrap bottles and slowly the first boxes were introduced. These boxes were much lighter and less expensive than the original ones made out of solid board. Nowadays, paper and paperboard are commonly used materials in nearly every industry. Worldwide about 300 million metric tons of paper and paperboard are produced each year. Probably the most important structural application is corrugated containers.



Figure 1.2 Creasing machine in industry

The disadvantage of existing creasing machine is that its set-up time is very large.

According to the changed dimensions of the corrugated sheets, we have to change the position of the creasers of upper and lower shafts. This is done manually, which takes considerable time.

Corrugated Board And Creasing Process:

Corrugated board consists of one or several layers of corrugated paper which is glued on or in between plane sheets of paper as shown in figure 2.1. The manufacturing process can roughly be divided into two parts. The wet part, where the fluting is corrugated between two rolls and then glued onto the liner, shown in figure 2.2, and the dry part, where heat is applied to dry the corrugated board. A problem in the manufacturing of corrugated board is when the moisture contents in the different layers are out of balance. Corrugated board is often considered to be the packaging material of the future.

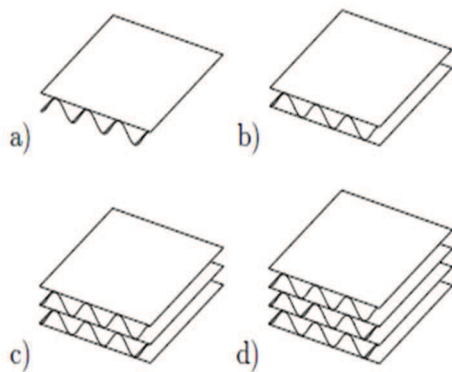


Figure 2.1 Types of corrugated board a) Single face b) Single wall c) Double wall. d) Triple wall.

Then the corrugated board can deform in a buckling shape or as a dip in the facings between the corrugations. These phenomena are called warp and washboard respectively.

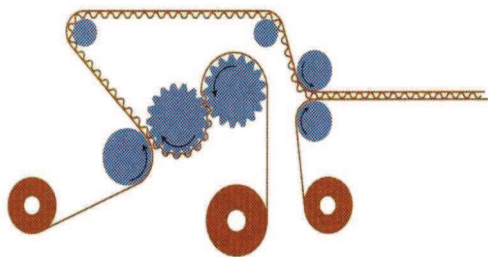


Figure 2.2: The manufacturing of a single wall corrugated board.

Advantages and Disadvantages

- Low weight.
- Saves money when transporting.
- Can be entirely customized for the purpose.
- It is strong and stiff compared to its weight.
- Easy to handle.
- Easy to print.
- Fully recyclable.
- Very sensitive to humidity.

Creasing Process: Creasing of corrugated board is an important technique used in the production of e.g. boxes. To fold a board in a proper way, crease lines are applied to define the folding line and to reduce the necessary moment to create a fold. When board is creased by a creaser, permanent deformation is induced. Locally it decreases the stiffness and the board is easily bent along the crease line. The local deformation causes an increase of stress and eventually may result in cracking of the board.



Figure 2.3 Process of creasing

Literature Review: Laminated paperboard is often used as a packaging material for products such as toys, tea and frozen foods. To make the paperboard packages appealing for consumers, the fold lines must be both neat and undamaged.[1] The quality of the folds depends on two converting processes: the manufacture of fold lines (creasing) and the subsequent folding. A good crease contains some delamination, initiated during creasing, to reduce the bending stiffness and to prevent the board from breaking during folding. [1] Paperboard is a widely used material in industrial processes, in particular for packaging purposes.[2] Packages are obtained through a forming process, in which a flat laminated sheet is converted into the final 3-D solid. In the package forming process, it is common practice to score the paperboard laminate with crease lines, in order to obtain folds with sharp edges and to minimize the initiation and propagation of flaws during the subsequent folding procedures [3]. The main purpose of the creasing operation is to introduce damage in the paperboard to locally reduce its bending stiffness. During loading it therefore important that the paperboard easily delaminates between its plies since this reduces the bending stiffness during folding. Moreover, the plies should internally be able to deform plastically in shear. [4] **Creaser Roller Cad Modeling:** The essential difference between Pro/ENGINEER and traditional CAD systems is that models created in Pro/ENGINEER exist as three-dimensional solids. Other 3-D modelers represent only the surface boundaries of the model. These models are the complete solid. This not only facilitates the creation of realistic geometry, but also allows for accurate model calculations, such as those for mass properties.

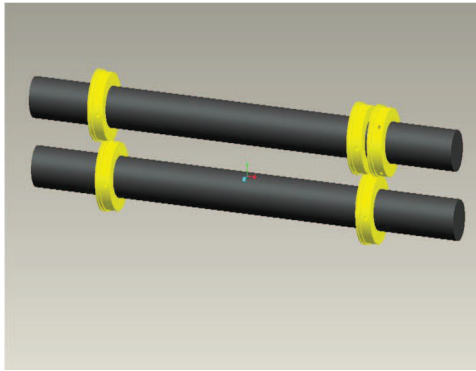


Figure 4.1 CAD model

Feature-Based Modeling: We created models in Pro/ENGINEER by building features. These features have intelligence, in that they contain knowledge of their environment and adapt predictably to change. Each feature asks the user for specific information based on the feature type. For example, a hole has a diameter, depth, and placement, while a round has a radius and edges to round. 3-Dimensional models can be obtained by feeding the required dimensions of standard scale in the Pro/ENGINEER software as shown in Figure 4.1 CAD Model. Figure 4.2 shows 2-Dimensional drafted machine components.

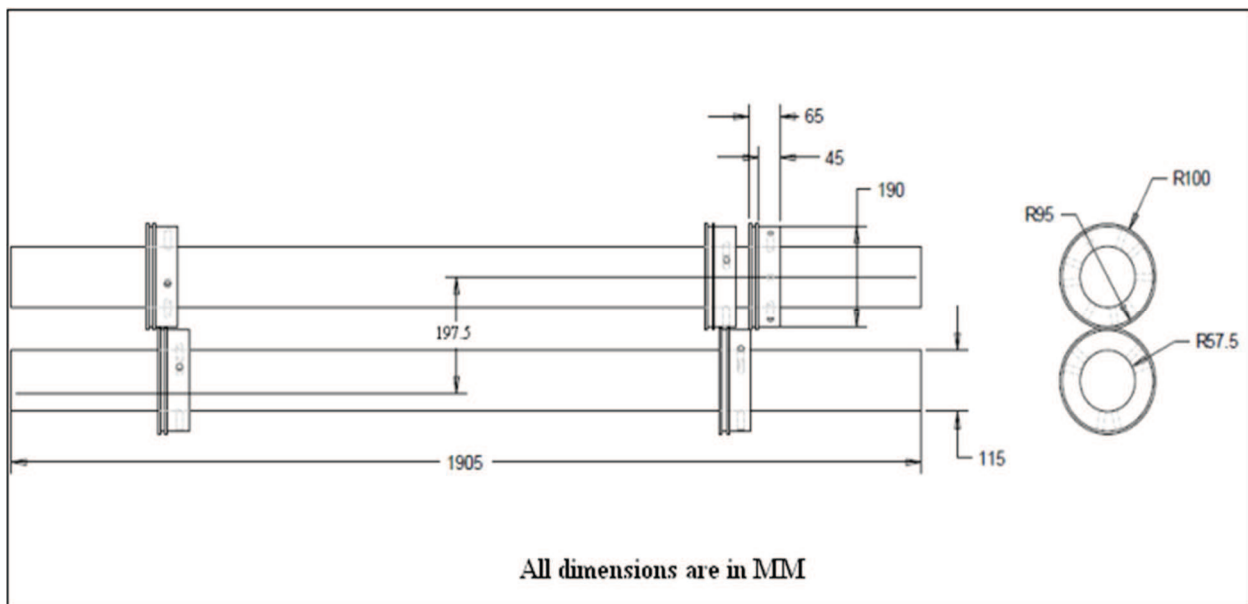


Figure 4.2 Drafting of machine components

Combining Features Into Parts: The various types of software features serve as building blocks in the progressive creation of solid parts. Certain features, by necessity, precede others in the design process. The features that follow rely on the previously defined features for dimensional and geometric references. The progressive design of features can create relationships between features already in the design and subsequent features in the design that reference them. The following figure illustrates the progressive design of features.

Fem Introduction: The finite element method (FEM), sometimes referred to as finite element analysis (FEA), is a computational technique used to obtain approximate solutions of boundary value problems in engineering. Simply stated, a boundary value problem is a mathematical problem in which one or more dependent variables must satisfy a differential equation everywhere within a known domain of independent variables and satisfy specific conditions on the boundary of the domain. Boundary value problems are also sometimes called field

problems. The field is the domain of interest and most often represents a physical structure.

The field variables are the dependent variables of interest governed by the differential equation. The boundary conditions are the specified values of the field variables (or related variables such as derivatives) on the boundaries of the field. Depending on the type of physical problem being analyzed, the field variables may include physical displacement, temperature, heat flux, and fluid velocity to name only a few.

Conclusion: The present work will focus mainly to optimize the production rate of available creasing machine with same boundary condition of input and raw material. The Fem testing can be useful to test the failures and can help in the design of new system. The set-up time reduction will help in reducing the idle time of the machine which in turn will be helpful in increase of over-all productivity. The work is under process and expected output is in terms of production rate of corrugated sheets/hr/shift.

References:

1. L.A.A. Beex, R.H.J. Peerlings, An experimental and computational study of laminated paperboard creasing and folding
2. Nyman, U. and Gustafsson, P.J., Material and Structural Failure Criterion of Corrugate Board Facings, Composite Structures, Accepted for publication
3. Nordstrand, T.M., (1995), Parametric study of the post-buckling strength of structural core sandwich panels, Composite Structures, 30, pp 441-451.
4. A. Giampieri, U. Perego, R. Borsari, A constitutive model for the mechanical response of the folding of creased paperboard
5. Mikael Nygårds , Magnus Just ,Johan Tryding, Experimental and numerical studies of creasing of paperboard
6. Allansson, A., (2001) Stability and collapse of corrugated board; Numerical and Experimental Analysis, Structural Mechanics LTH, Sweden
7. Beldie, L., (2001) Mechanics of paperboard packages, performance at short term static loading, Div. of Structural Mechanics, Lund University.
8. Biancolini, M. E., (2005) Evaluation of equivalent stiffness properties of corrugated board, Composite Structures 69 (3).
9. L.G.J. Gooren, Creasing Behavior of Corrugated Board
10. Brekelmans, W.A.M., (2002) Mechanical Characterisation of Materials: Constitutive Modelling, dictaat 4797, TU/e Eindhoven,

Research Scholar, Yeshwantrao Chavan College of Engineering, Nagpur
Associate Professor, Department of Mechanical Engineering
lalitakhatri123@gmail.com, sachu_gm@yahoo.com